


GRINAKEE TERRACE TBLOK


The Grinaker Terrace Blok system has unique features that firmly establish it as a market leader.

- **Economical** – 8 blocks per square metre
- **Open or Closed Face Options** – By the use of a unique slider that fits easily between the blocks.
- **Plantability** – It's open back design and trough shape create a greenhouse effect within the environs of the block. This promotes healthy rapid plant growth with unrestricted root systems that aid in the stabilisation of the bank.
- **Quality** – This product is manufactured under ISO 9002 requirements and carries a full manufacturers warranty.
- **Testing** – Backed by full scale tests conducted by independent geotechnical engineers, every aspect of Terrace Blok has been checked to establish the design integrity of the system.

BLOCKS

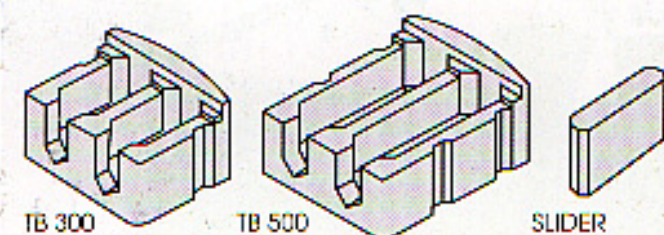

LAYING



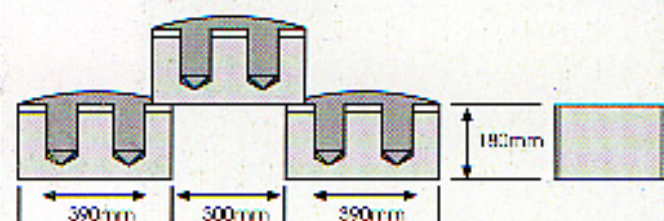


* Slider used for closed walls

Technical details	TB 300	TB 500
Mass per block	32 kg	48 kg
Length	325mm	500mm
Width	390mm	390mm
Height	180mm	180mm
No. of blocks per m ²		
• Straight line	8	8
• Curved Structure	9 – 10	9 – 10
Standard Wall Angle	70°	70°
Engineered Options	55° / 70°	55° / 70°

Cautionary Note:

- The design of dry stack concrete retaining systems involves geotechnical rather than structural elements.
- Check with your local authorities regarding their requirements for the design, plan submission and stability certification of your retaining structure before commencing construction.
- This leaflet serves as a guideline not a guarantee. For specific applications please make use of our free technical service.

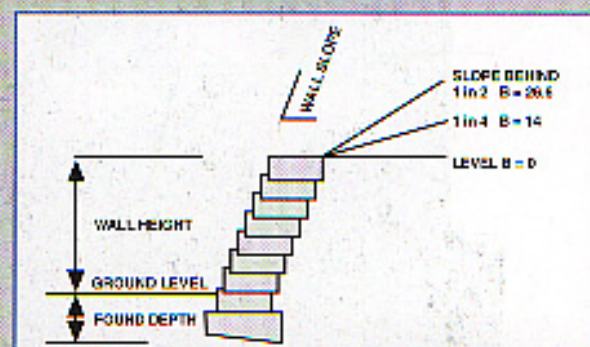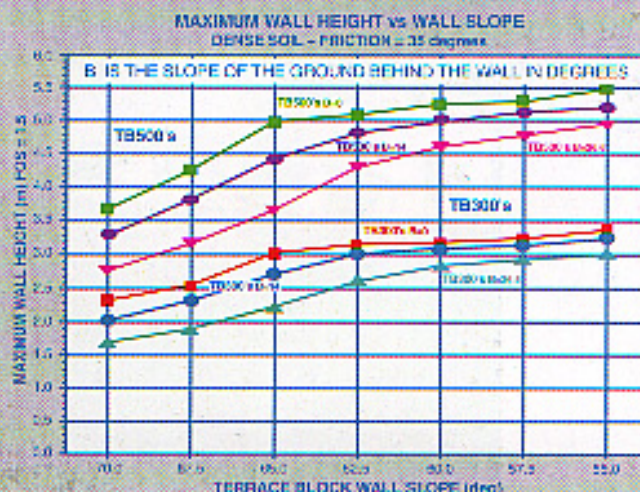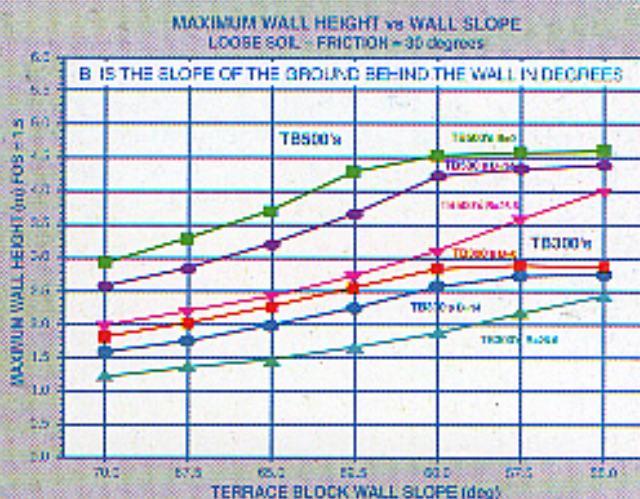

Kwazulu Natal: (Sales Office)
Effingham Quarry, Effingham Road
P O Box 40313, Red Hill 4071
Tel: (031) 84 1304, Fax: (031) 84 1376

Gauteng: (Sales Office)
1 Rosettenville Road, Springfield
P O Box 1589, Rosettenville 2130
Tel: (011) 434 3623, Fax: (011) 434 4300

GRINAKEE
PRECAST